




# Gateway MD2614u Internal Modem Replacement

This guide will instruct you on replacing the internal modem

Written By: Nelson

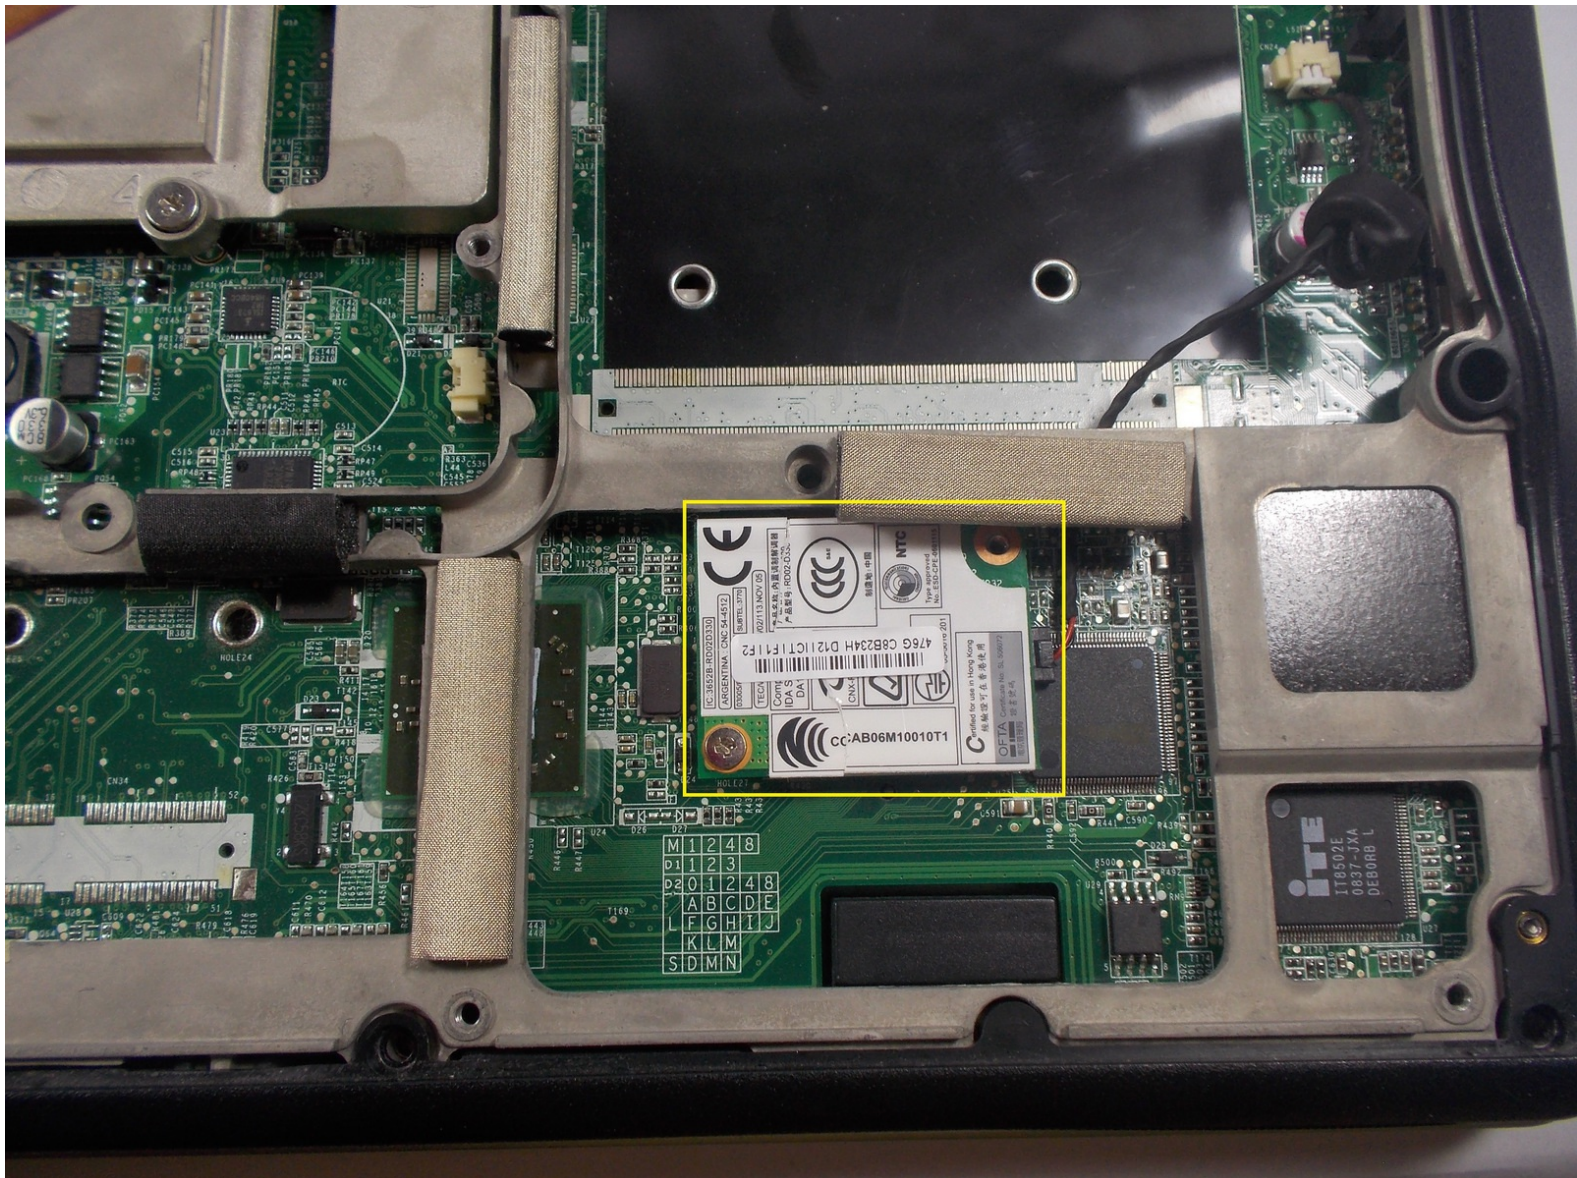



## TOOLS:

- [Spudger](#) (1)
  - [Large Needle Nose Pliers](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-



## Step 1 — Back Cover



- Place the laptop so the back cover is facing up.

## Step 2



- Remove the 8 screws from the back cover using the Phillips #00 screwdriver.

## Step 3



- Lift off the cover.

## Step 4 — Internal Modem



- The internal modem will be located towards the bottom right of the laptop (highlighted with a yellow square).



## Step 5




- Using a Phillips #00 screwdriver, unscrew both of the screws that are holding the modem in place.

## Step 6



- Carefully pry the modem as to not damage any of the surrounding components

## Step 7

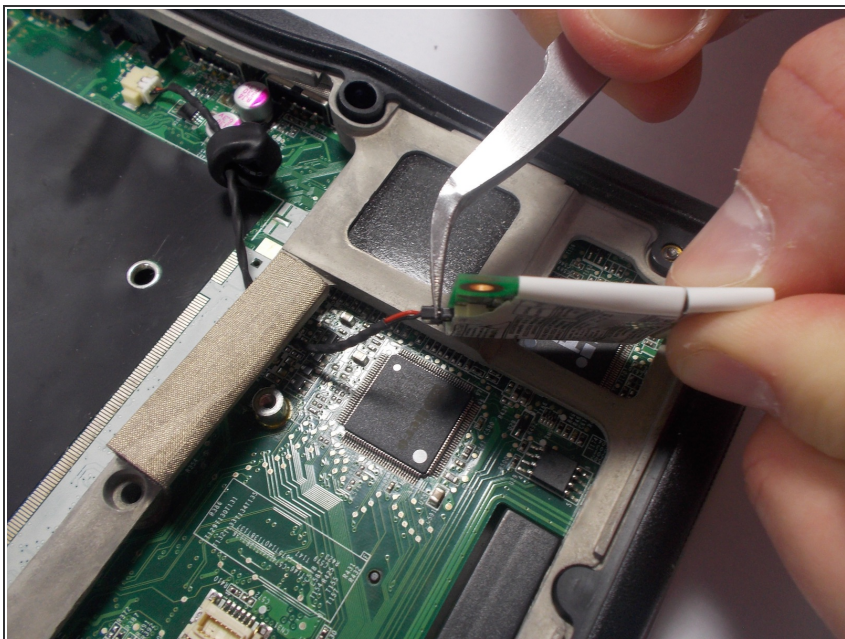

- Using needle nose pliers, carefully detach the wire connecting the modem, by applying pressure to the black tabs away from the modem itself.

## Step 8



- Success! You've removed the internal modem!

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 12:10:10 AM.